
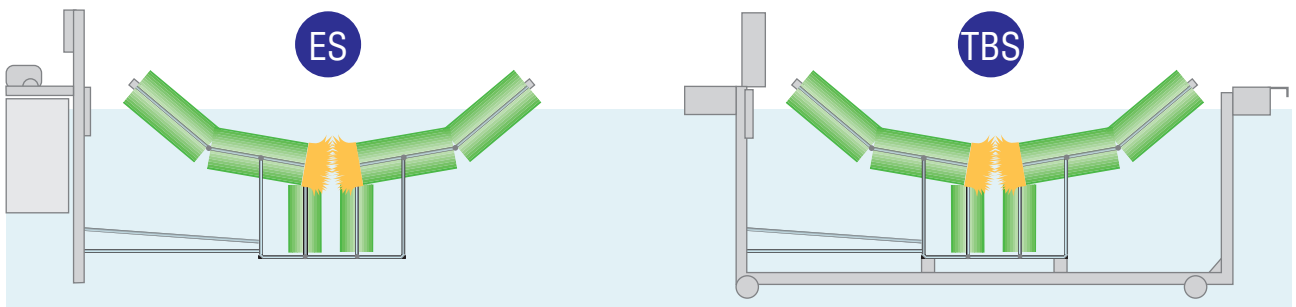
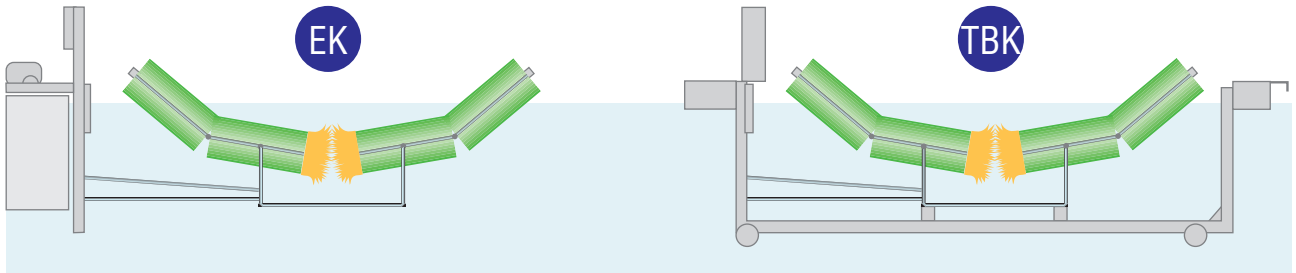


STARK PRODUCT LINE

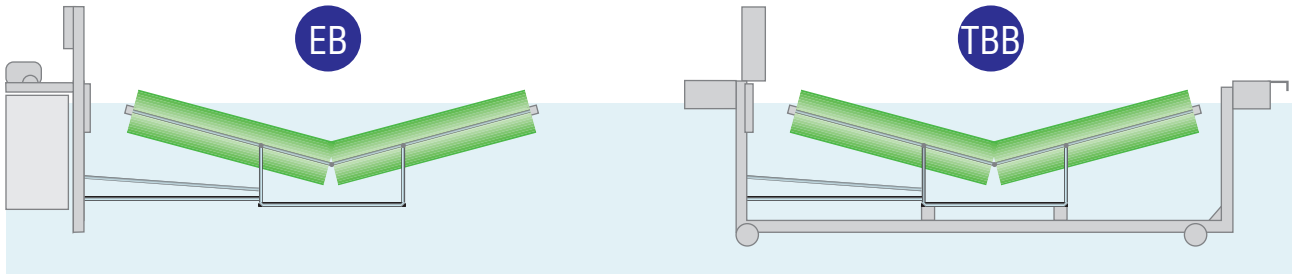


E = One pair of brushes


TB = Two pairs of brushes

For example EK 400/100
= One pair of brushes for
4 m wide boat with 1 m deep keel.

The adjustable ledges come with
all TB models.

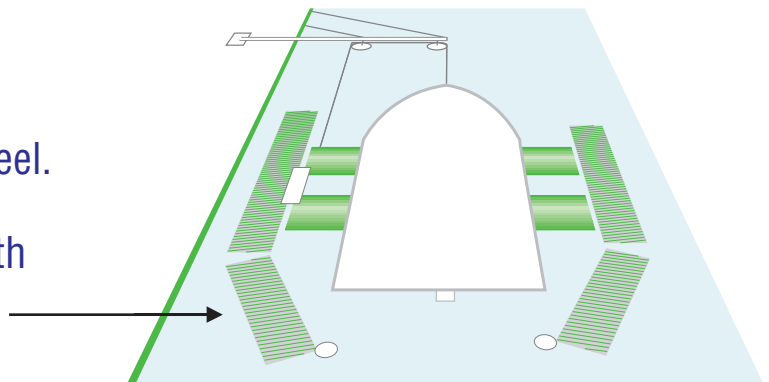

TECHNICAL SKETCH OF THE **PATENTED** STARK **ECO B (EB)** BOATWASHER

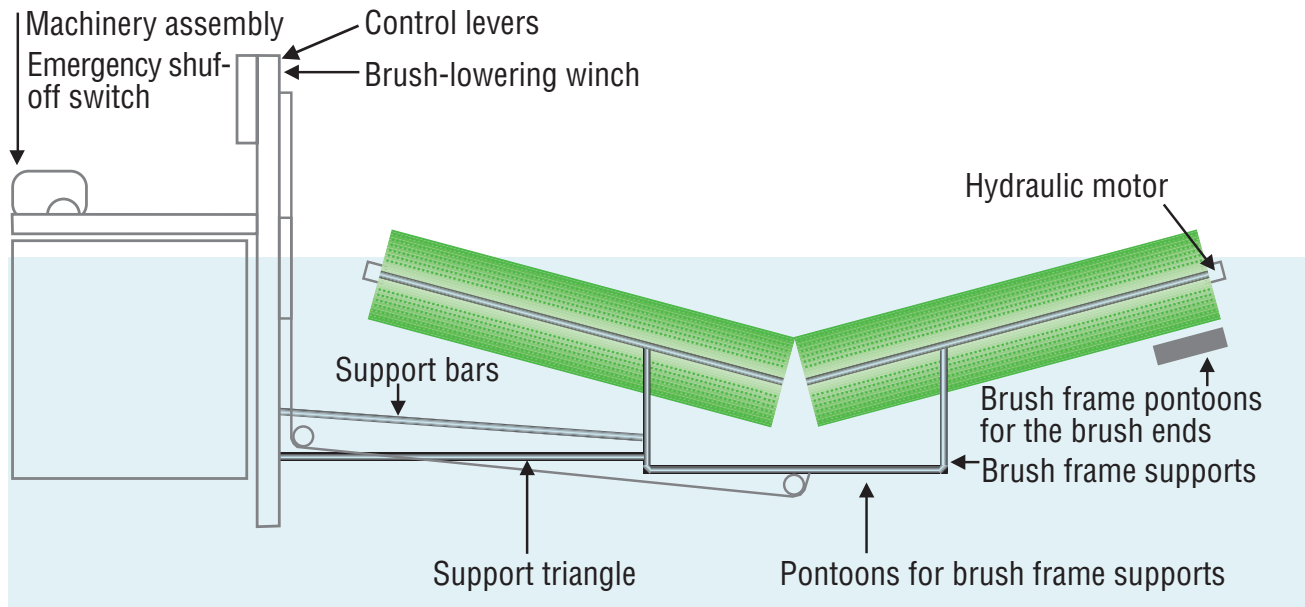

TECHNICAL DATA

Ideal for V-bottom motorboats

Maximum width of boat accommodated 3 meters

Maximum length accommodated No limit

Boatwasher measurements

Height 2.2 meters

Length 4.1 meters

Width 1.2 meters


Weight 500 kilograms

Washing speed Approximately 1 to 2 meters per minute

Number of washing brushes 2 hydraulic driven

Output requirement 2.0 kW (220V, 16A),
2-phase

TECHNICAL SKETCH OF THE **PATENTED** STARK **ECO K (EK)** BOATWASHER

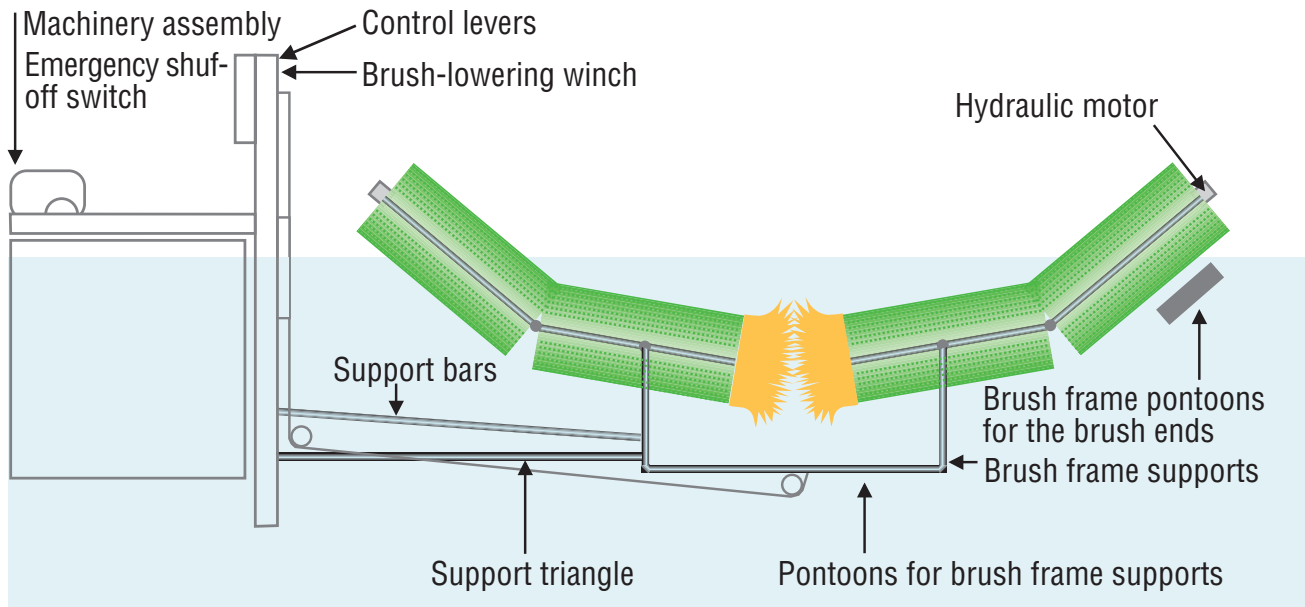

TECHNICAL DATA

Ideal for motorboats with or without keel

Maximum width of boat accommodated 3 meters

Maximum length accommodated No limit

Boatwasher measurements

Height 2.2 meters

Length 4.1 meters

Width 1.2 meters


Weight 600 kilograms

Washing speed Approximately 1 to 2 meters per minute

Number of washing brushes 2 hydraulic driven

Output requirement 2.0 kW (220V, 16A),
2-phase

TECHNICAL SKETCH OF THE **PATENTED** STARK **ECO S (ES)** BOATWASHER

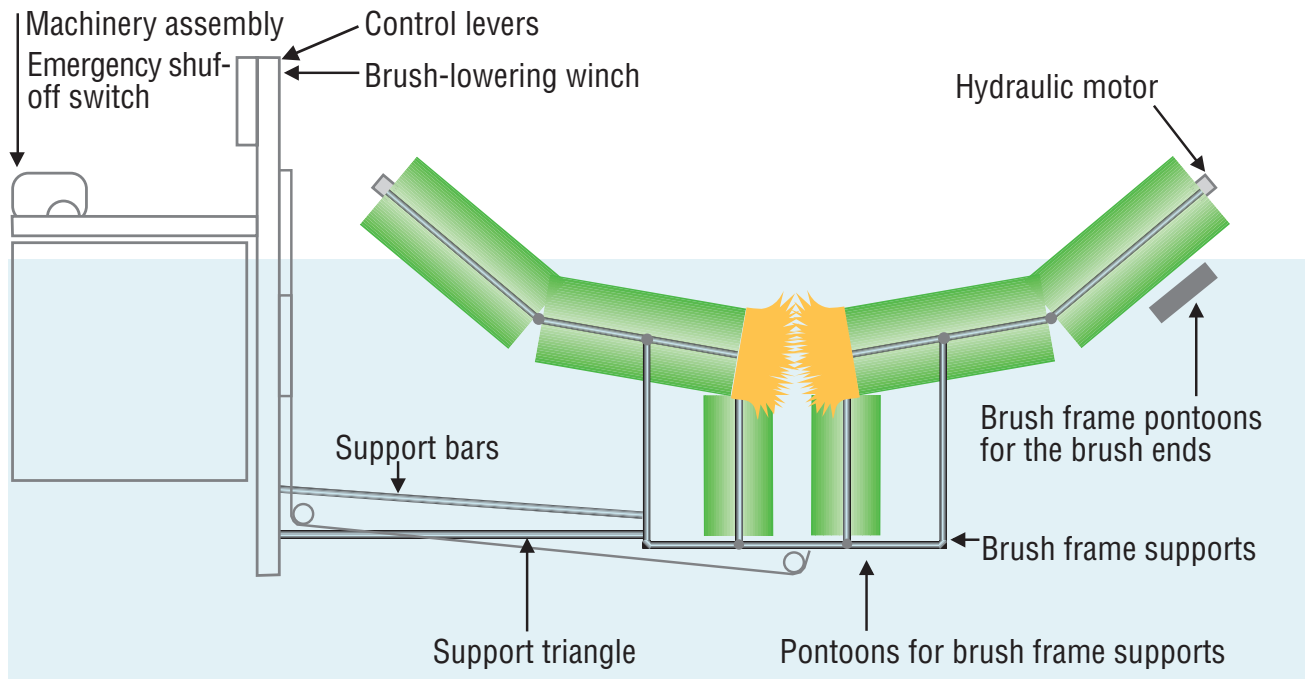

TECHNICAL DATA

Ideal for motorboats and sailboats

Maximum width of boat accommodated 3 meters

Maximum length accommodated No limit

Boatwasher measurements

Height 2.2 meters

Length 4.1 meters

Width 1.2 meters


Weight 700 kilograms

Washing speed Approximately 1 to 2 meters per minute

Number of washing brushes 2 hydraulic driven

Output requirement 4.0 kW (380V, 16A),
3-phase

TECHNICAL SKETCH OF THE **PATENTED** STARK **TWIN BRUSH B (TBB)** BOATWASHER

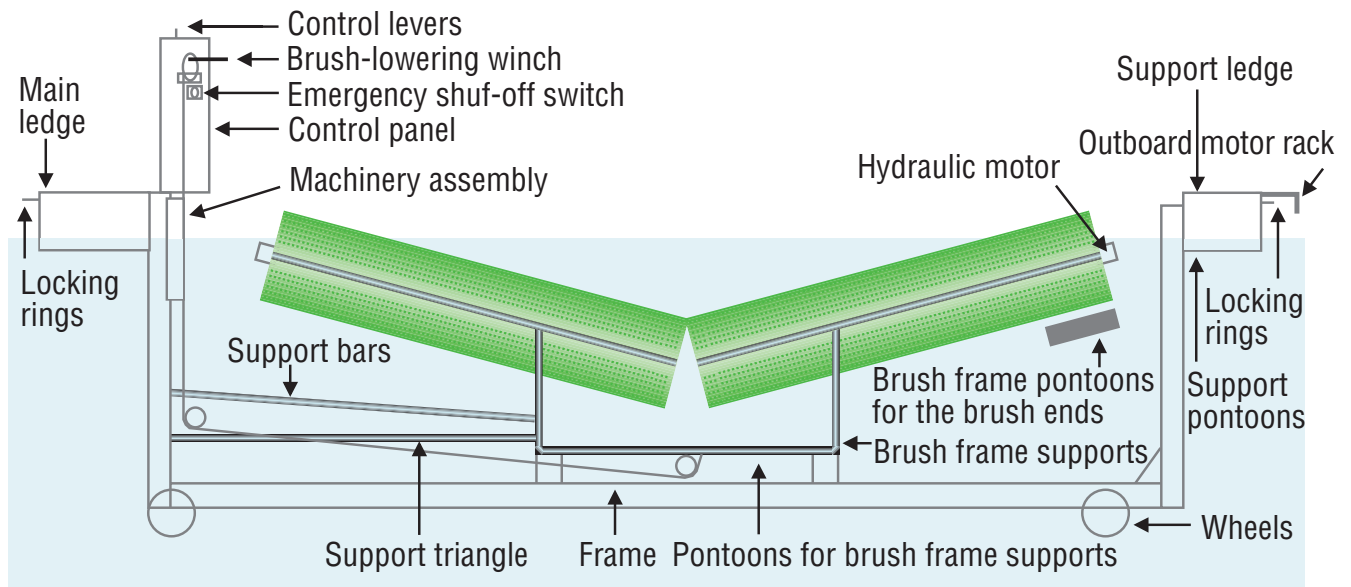

TECHNICAL DATA

Ideal for V-bottom motorboats

Maximum width of boat accommodated 3-4 meters

Maximum length accommodated No limit

Boatwasher measurements

Height 2.4 meters

Length 5.8 meters

Width 2.4 meters


Weight 1.200-1.500 kilograms

Washing speed Approximately 1 to 2 meters per minute

Number of washing brushes 4 hydraulic driven

Output requirement 4.0 kW (380V, 16A), 3-phase

TECHNICAL SKETCH OF THE **PATENTED** (TBK) STARK BOATWASHER

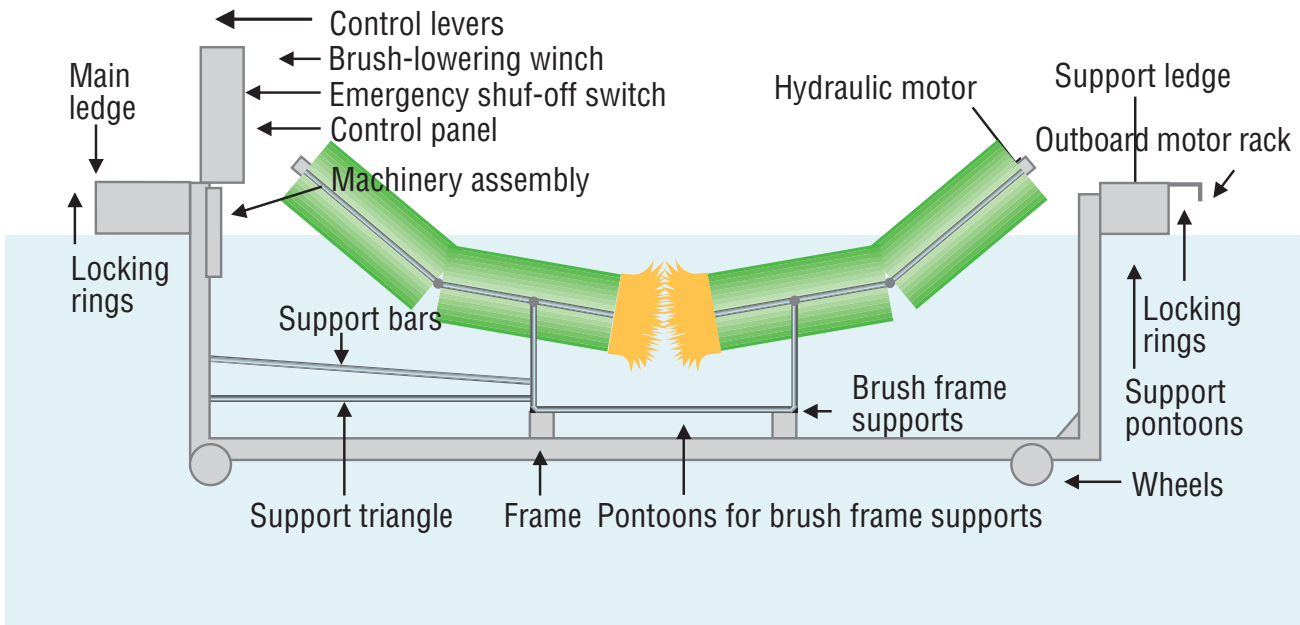

TECHNICAL DATA

Ideal for motorboats and sailboats

Maximum width of boat accommodated 3-4 meters

Maximum length accommodated No limit

Maximum depth of keel 1 meters

Boatwasher measurements

Height 2.4 meters

Lenght 5.8 meters

Width 2.4 meters

Weight 1,400 kg

Washing speed meters per minute Approximately 1 to 2

Number of washing brushes


4 hydraulic driven

Output requirement

4.0 kW (380V, 16A),

3-phase

TECHNICAL SKETCH OF THE **PATENTED** (TBS) STARK BOATWASHER

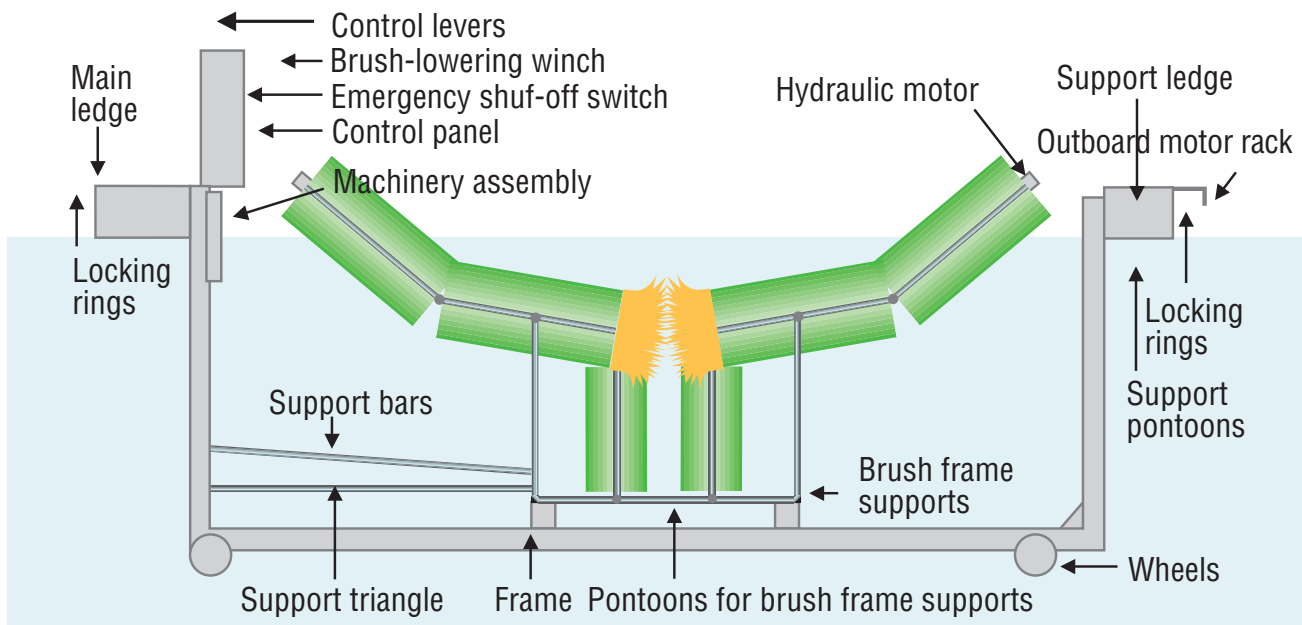

TECHNICAL DATA

Ideal for motorboats and sailboats

Maximum width of boat accommodated 3-4 meters

Maximum length accommodated No limit

Maximum depth of keel 2-2,5 meters

Boatwasher measurements

Height 2.4 meters

Lenght 5.8 meters

Width 2.4 meters

Weight 1,400 kilograms

Washing speed meters per minute Approximately 1 to 2

Number of washing brushes 4 hydraulic driven

Hydraulic fluid Rape-speed oil

Output requirement 4.0 kW (380V, 16A), 3-phase